



Grounding Pipe Clamps

Industry Leading Design



Pipe Clamps

- Pipe clamps for Lightning Protection and Grounding copper conductor.
- Used on pipes, conduit, fence posts, pedestals, rebar, railings, etc.
- Dual UL Listing (UL96 and UL467).
- Rated for direct burial in earth and concrete.
- Conductor range #6 Solid through 250 MCM.
- Silicon Bronze hardware available.

Pipe Range .5/.75


Part No.	Nominal Pipe Size Range	Pipe Outside Diameter
CPC.5/.75	.5" - .75"	0.375" - 1"



Pipe Range 1/1.25

Part No.	Nominal Pipe Size Range	Pipe Outside Diameter
CPC1/1.25	1" - 1.25"	0.9375" - 1.7"

- Features a quick connect, bi-directional design.
- Pressed stud design ensures a flush mounting surface.




Pipe Range 1.5/2 - 5/6

Part No.	Nominal Pipe Size Range	Pipe Outside Diameter
CPC1.5/2	1.5" - 2"	1.25" - 2.4"
CPC2.5/3	2.5" - 3"	2.5" - 3.5"
CPC3.5/4	3.5" - 4"	3.375" - 4.5"
CPC5/6	5" - 6"	4.75" - 6.63"


- Features a quick connect, bi-directional design.
- Pressed stud design ensures a flush mounting surface.




Fence Post Application

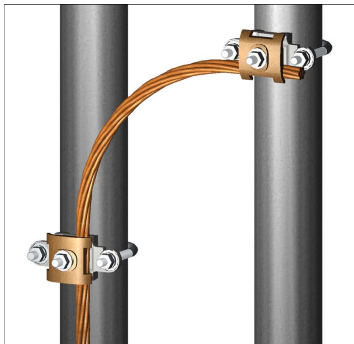

Bi-directional Design



Fence Gate Application

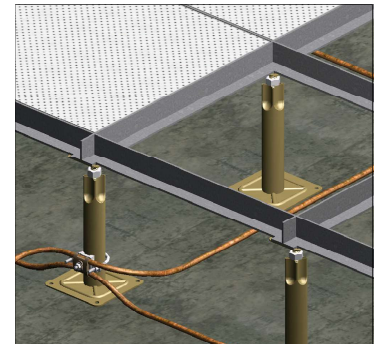


Pedestal Application

Tamper Proof CPC Pipe Clamps


Tamper Proof option has break away nuts to reduce theft.

Tamper Proof	Nominal Pipe Size Range	Pipe Outside Diameter
CPC.5/.75TP	.5" - .75"	0.375" - 1"
CPC1/1.25TP	1" - 1.25"	0.9375" - 1.7"
CPC1.5/2TP	1.5" - 2"	1.25" - 2.4"
CPC2.5/3TP	2.5" - 3"	2.5" - 3.5"
CPC3.5/4TP	3.5" - 4"	3.375" - 4.5"
CPC5/6TP	5" - 6"	4.75" - 6.63"


- Features a quick connect, bi-directional design.
- Pressed stud design ensures a flush mounting surface.
- Nuts break away at approximately 120 in/lbs.

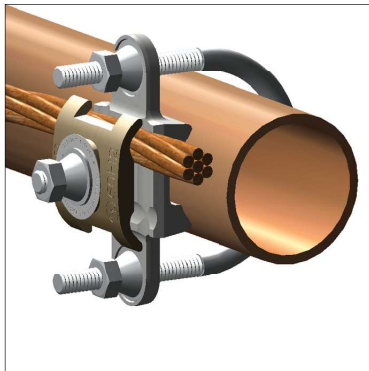

Tamper Proof: Step 1

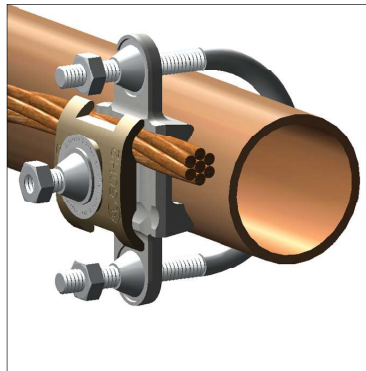

Tamper Proof: Step 2

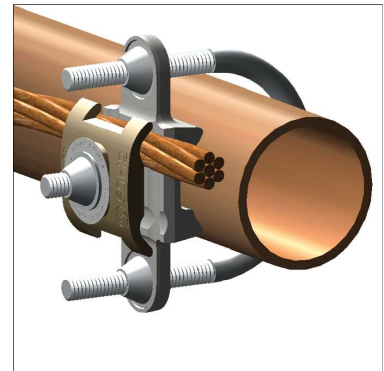

Completed Installation

Universal Pipe Clamps

- Provides 1-1/2" of contact area for sufficient electrical contact for both ground fault and lightning current.
- Manufactured from electro tinned copper and feature stainless steel hardware.
- Connect to ground conductors via exothermic connections and/or standard compression lugs.
- Lug ends are 1/4" x 1" and have holes that are 3/8" diameter 1" on center spacing.
- Dual UL Listing (UL96 and UL467).




Part No.	Nominal Pipe Size Range	Pipe Outside Diameter
UPC.75/1.25*	.75" - 1.25"	1" - 1.25"
UPC1.5/2	1.5" - 2"	1.25" - 2.4"
UPC2.5/3	2.5" - 3"	2.5" - 3.5"
UPC3.5/4	3.5" - 4"	3.375" - 4.5"
UPC5/6	5" - 6"	4.75" - 6.63"

* UPC.75/1.25 provides bi-directional capabilities.



CPC Cross Reference

Harger's CPC Series of Pipe Ground Clamps reduce inventory and increase profits by providing greater range taking capacity. Harger's 6 CPC Pipe Clamps replace up to 93 different BURNDY® Series Clamps. Only Harger's CPC Series Clamps are UL listed for both electrical grounding and lightning protection.

	Harger Part	BURNDY® GAR Part	BURNDY® GD Part	BURNDY® GP Part	Harger Conductor Range	Harger Actual OD Range
	CPC.5/.75	GAR114C*		GP114C*	#6 Solid - 250 MCM	0.375" - 1"
		GAR1126		GP1126		
		GAR1129		GP1129		
		GAR644C*		GP644C*		
		GAR6426		GP6426		
		GAR6429		GP6429		
		GAR144C*		GP144C*		
		GAR1426		GP1426		
		GAR1429		GP1429		
	CPC1/1.25	GAR144C*		GP144C*	#6 Solid - 250 MCM	0.9375" - 1.7"
		GAR1426		GP1426		
		GAR1429		GP1429		
		GAR154C*				
		GAR1526	GD1526			
		GAR1529	GD1529			
		GAR164C*		GP164C*		
		GAR1626	GD1626			
		GAR1629	GD1629	GP1629		
	CPC1.5/2	GAR154C*			#6 Solid - 250 MCM	1.25" - 2.4"
		GAR1526	GD1526			
		GAR1529	GD1529			
		GAR164C*		GP164C*		
		GAR1626	GD1626			
		GAR1629	GD1629	GP1629		
		GAR174C*	GD174C*			
		GAR1726	GD1726	GP1726		
		GAR1729	GD1729			
		GAR184C*	GD184C*	GP184C*		
		GAR1826	GD1826	GP1826		
		GAR1829	GD1829			
	CPC2.5/3	GAR194C*	GD194C*		#6 Solid - 250 MCM	2.5" - 3.5"
		GAR1926	GD1926			
		GAR1929	GD1929			
		GAR204C*	GD204C*			
		GAR2026	GD2026	GP2026		
		GAR2029	GD2029			
	CPC3.5/4	GAR214C*	GD214C*		#6 Solid - 250 MCM	3.375" - 4.5"
		GAR2126	GD2126			
		GAR2129	GD2129			
		GAR224C*	GD224C*			
		GAR2226	GD2226	GP1226		
		GAR2229	GD2229			
	CPC5/6	GAR224C*			#6 Solid - 250 MCM	4.75" - 6.63"
		GAR2426				
		GAR2429				
		GAR8629				



BURNDY® is a registered trademark of FCI-BURNDY Products
 *BURNDY® Part # has a #8 Solid minimum

